MEMORANDUM: 03-043

DATE: April 23, 2003

TO: James McCord,

Chairman, Single Cylinder Diesel Surveillance Panel

FROM: Scott Parke


SUBJECT: 1M-PC Testing from October 1, 2002 through March 31, 2003

Fourteen calibration tests were reported to the Test Monitoring Center during the period from October 1, 2002 through March 31, 2003. The data from the operationally valid tests is shown on page 6. Following is a summary of testing activity this period.

	Reporting Data	Calibrated on 3-31-03
Number of Labs	4	4
Number of Stands	9	9

Stands reporting data this period were distributed as shown below:


1M-PC LABORATORY / STAND DISTRIBUTION

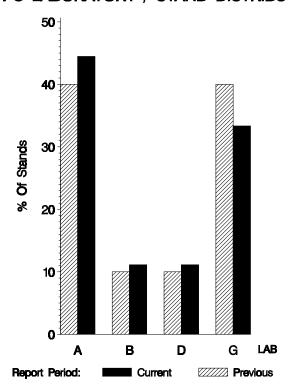

Test Distribution by Oil and Validity


				Tot	als
		873-1	873-2	Last Period	This Period
Accepted for Calibration	AC	5	6	9	11
Rejected Mild	OC	0	0	0	0
Rejected Severe	OC	0	0	3	0
Rejected for EWMA Precision	OC	0	0	0	0
Rejected for Shewhart Precision	OC	0	0	0	0
Operationally Invalid (lab)	LC	0	2	0	2
Operationally Invalid (lab/TMC)	RC	0	0	0	0
Aborted Calibration	XC	0	1	2	1
Total		5	9	14	14

1M-PC CALIBRATION ATTEMPT SUMMARY

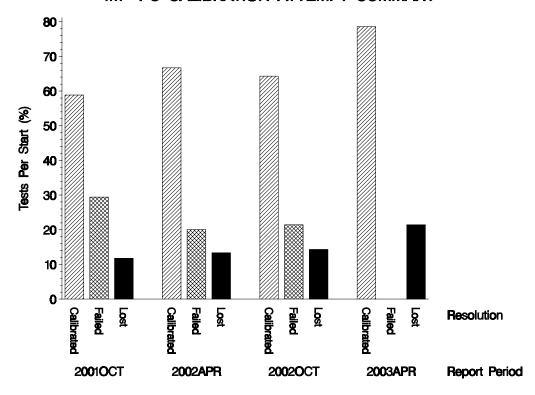


The test-per-start ratio for calibrated, failed, and lost tests is shown above.

OPERATIONALLY VALID 1M-PC TESTS FAILING ACCEPTANCE CRITERIA

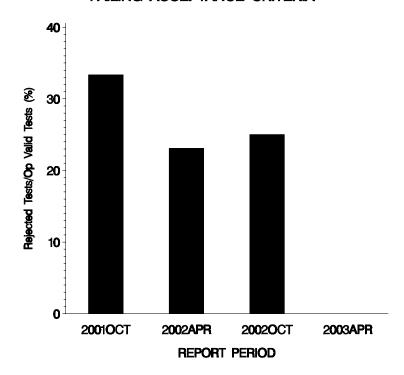


No tests failed this period. No LTMS deviations were written this period. A total of two deviations have been written over the life of this test.

By lab, the tests run this report period were distributed as shown below:

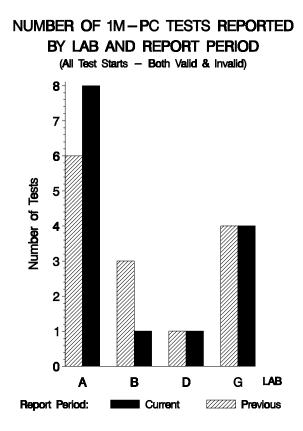

With all operationally invalid tests removed, the distribution looks like this:

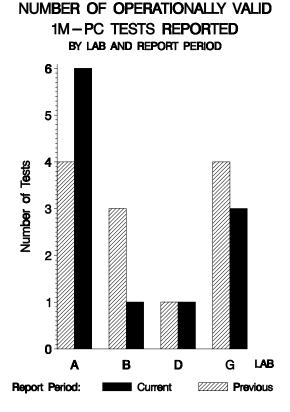


And the by-lab distribution of lost tests:

NUMBER OF LOST

1M-PC TESTS REPORTED

BY LAB AND REPORT PERIOD

2

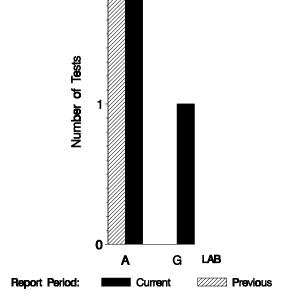

Lost Tests per Start by Oil and Lab:

	873-1			873-1 873-2			Total		
Lab	Lost	Starts	%	Lost	Starts	%	Lost	Starts	%
A	0	1	0	2	7	29	2	8	25
В	0	1	0				0	1	0
D				0	1	0	0	1	0
G	0	3	0	1	1	100	1	4	25
Total	0	5	0	3	9	33	3	14	21

Lost tests are those that were either aborted, rejected by lab, or operationally invalid.

Causes for Lost Tests:

			C	il	,	Validity		Loss Rate		e
Lab	Cause		873-1	873-2	LC	RC	XC	Lost	Starts	%
A	Intake valve failure prod WTD. Aborted at 12 h due to v			•	•		•	2	8	25%
G	being run. G Micromotion failure produced erratic fuel rate.			•	•			1	4	25%
		Lost	0	3	2	0	1			_

Lost	0	3	2	0	1
Starts	5	9	14	14	14
%	0%	33%	14%	0%	7%

Average ∆/s by Lab						
Lab	Lab n TGF					
A	6	1.294	1.247			
В	1	1.677	1.295			
D	1	0.311	-0.659			
G	3	0.600	1.084			
Industry	11	1.050	1.034			

DATA FROM ALL OPERATIONALLY VALID TESTS REPORTED THIS PERIOD:


LTMS							
DATE	LAB	STAND	OIL	TG	WD	TGYI	WDYI
0000400=		404	0=0.4			0.070	4 470
20021027	G	10A	873-1	47	306.9	0.373	1.473
20021118	G	8A	873-1	64	309.6	1.429	1.527
20021210	G	13A	873-1	41	245.2	0.000	0.251
20021213	Α	1	873-1	53	302.2	0.745	1.380
20021218	Α	5	873-2	68	322.8	1.677	1.788
20021224	Α	6A	873-2	72	264.1	1.925	0.626
20030107	В	7	873-1	68	297.9	1.677	1.295
20030113	Α	6A	873-2	69	331.1	1.739	1.952
20030209	D	2	873-2	46	199.2	0.311	-0.659
20030211	Α	9	873-2	43	243.0	0.124	0.208
20030219	Α	9	873-2	66	309.7	1.553	1.529

DISCUSSION OF INDUSTRY PERFORMANCE OVER THIS PERIOD

TGF:

TGF over this period was again severe and continues to exceed the EWMA action limit. Industry average TGF Yi was 1.050 (see table on previous page). Using 873-1's test target standard deviation of 16.1 to compute an average Δ yields 17% TGF. Despite repeated attempts, the Single Cylinder Diesel Surveillance Panel has not yet determined a cause. There is some indication that the change in liner suppliers might be contributing to the problem.


CATERPILLAR 1M-PC INDUSTRY OPERATIONALLY VALID DATA

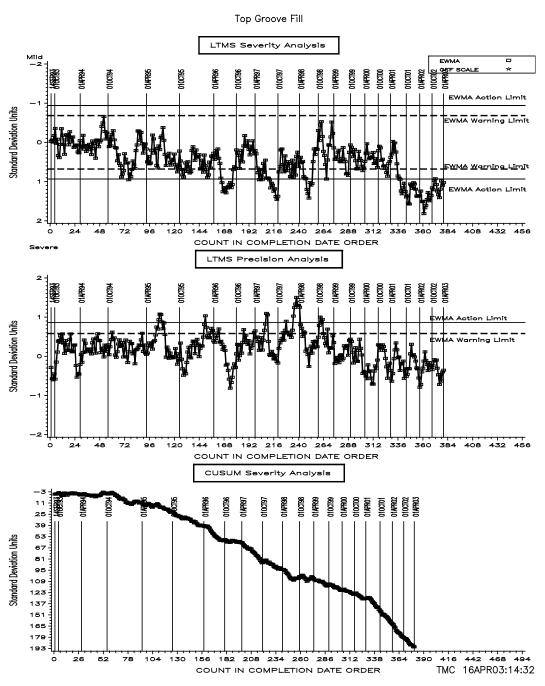

WTD:

WTD also continues to be severe (and has since April '98). Industry average WTD Yi was 1.034 (equivalent to 52.2 demerits severe when multiplied by 873-1's standard deviation of 50.5). Precision remained within acceptable limits this period.


CATERPILLAR 1M-PC INDUSTRY OPERATIONALLY VALID DATA

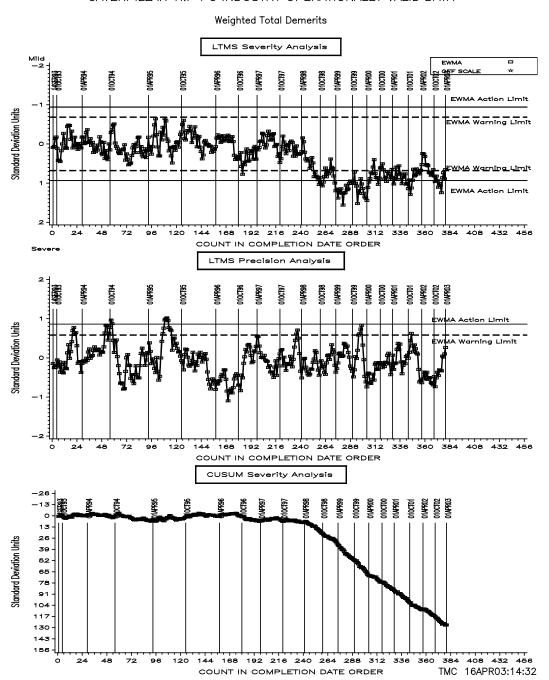

POOLED S:

Shown below is a bar chart comparing the pooled s values for the 1M-PC test parameters over the last four report periods. Precision for both parameters, as measured by pooled s, is comparable to previous periods.

1M-PC REFERENCE TEST PRECISION POOLED STANDARD DEVIATION BY SIX-MONTH ASTM REPORT PERIOD

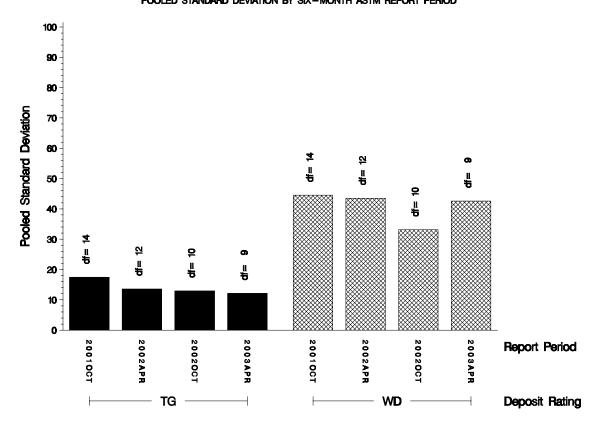

STATUS OF REFERENCE OIL SUPPLY:

At the end of this report period, the testing oil supply stood as outlined in the table below:

		@ TI	MC
Oil	Cans @ Labs	Cans	Gallons
873-1	7	2	25
873-2	10	134	1345
Total	17	136	1370

^{*} Future reblends of any oils marked with an asterisk are not obtainable by TMC.

Introduction of oil 873-2 into testing is now complete. There appears to be no performance difference between this blend and 873-1. The surveillance panel has elected to carry over the 873-1 targets for 873-2 rather than calculate targets specific to 873-2.

TIMELINE OF SIGNIFICANT EVENTS IN THE LIFE OF THE 1M-PC TEST:

Effective	Info	
Date	Letter	
Date 19940419 19940927 19941031 19941225 19950401 19950728 19950728 19950728 19950728 19950728 19950728 19960315 19960315 19960315 19960414 19980209 19980209	95-1 95-1 95-1 95-1 95-1 95-1 95-1 96-1 96-1 96-1 98-1 98-1	FIRST USE OF 873-1 FIRST EXHAUST BARREL TEST LAST USE OF 873 LAST NON-EXHAUST BARREL TEST LTMS INTRODUCTION REWRITTEN PROCEDURE ISSUED ALONG WITH INFORMATION LETTER 95-1 LINER WEAR STEP MEASUREMENT TECHNIQUE CHANGED TO CONFORM TO 1k/1N REMOVAL OF MAXIMUM ALLOWABLE LSC SPECIFICATION ADOPTION OF THE STANDARDIZED TEST REPORT COVER SHEET EXHAUST BACKPRESSURE SPECIFICATION CHANGED TO ABSOLUTE PRESSURE EXHAUST TEMPERATURE SPECIFICATION LOWERED IMPLEMENTATION OF DATA DICTIONARY AND REPORT FORMS (VERSION=19950607) FUEL FLOW MEASUREMENT DEVICE SPECIFICATION CLARIFIED HUMIDITY CALIBRATION SCHEDULING REQUIREMENT CHANGED EDITORIAL CHANGES FORMS CHANGES REVISED WARRANTY PROCEDURE & FORMS FUEL SUPPLIER NAME CHANGE COOLANT ADDITIVE NAME CHANGE (PENCOOL 2000)
19980209	98-1 98-2	TMC FAX NUMBER CHANGE ADD FUEL, LTMS, AND OTHER 1K/1N-TYPE FORMS & EXAMPLES TO TEST REPORT
	98-3	ADD RATING WORKSHEET (FORM 4A) TO TEST REPORT
19981109	98-4	ADD AREAS FOR CLEAN TO RATING SHEETS 5 & 5A
	98-5	CORRECTION TYPO IN 98-2 TO FUEL AND COOLANT SUPPLIER NAMES
	99-1	UPDATED INTAKE AIR FILTER REQUIREMENTS
	99-1	RE-CALIBRATION REQUIREMENTS WHEN CRANK IS REMOVED
	99-1 99-1	VISUAL INSPECTION OF INTAKE AIR BARRELS
19990419	99-1	COOLANT SYSTEM FLUSHING REQUIREMENTS TEST STAND INSTRUMENTATION CALIBRATION REQUIREMENTS
	99-1	USE OF MOBIL EF-411 AS BUILD-UP/FLUSHING OIL
	99-1	TIME ZONE FOR USE IN EOT REPORTING
	99-1	FUEL INJECTION PUMP REPLACEMENT
	99-1	EDITORIAL
20010508		FIRST 1Y3995 LINER TEST
20020428		FIRST 873-2 TEST

RATING:

No referee re-rates were requested this report period.

Rating Re-rate Summary

Total number of re-rates requested	0
Number of tests where lab rating was changed	0
Number of tests where referee rating was changed	0
Number of tests where no changes were made	0

LAB VISITS:

No 1M-PC lab visits were completed during this period.

INFORMATION LETTERS:

No information letters were issued during this period.

FUEL BATCH APPROVAL:

During this period, the following fuel batches were approved for testing: QJ3121LS01, QL2321LS11, RA2421LS02, and RC1421LS03.

SUMMARY

- Over the course of this report period, industry TGF continued to be severe. The WTD severe trend begun during the April '98 report period also continues. There seems to be some indication that the new liner supply is exacerbating the problem. 873-2 introduction is complete; performance so far has been comparable to 873-1.
- Precision for both TGF and WTD remained within limits throughout the period.

SDP/sdp/astm0403.doc/mem03-043.sdp.doc

c: J. L. Zalar

F. M. Farber

Abdul Cassim

Single Cylinder Diesel Surveillance Panel

ftp://ftp.astmtmc.cmu.edu/docs/diesel/scote/semiannualreports/1mpc-04-2003.pdf

Distribution: internet