



# Test Monitoring Center

6555 Penn Avenue  
Pittsburgh, PA 15206-4489  
(412) 365-1000


MEMORANDUM: 05-050  
DATE: June 7, 2005  
TO: Wim Van Dam, Chairman, Mack Surveillance Panel  
FROM: Jeff Clark  
SUBJECT: T-11 Calibration Testing for the April 2005 ASTM Report Period

The following is a summary of T-11 reference oil tests completed during the April 2005 ASTM report period, which began on October 1, 2004 and ended on March 31, 2005.

### Lab / Stand Distribution:

	Reporting Data	Calibrated as of 3/31/05
Number of Laboratories	5	5
Number of Stands	7	7


The figure below shows the T-11 laboratory / stand distribution for tests completed the current and previous report periods:

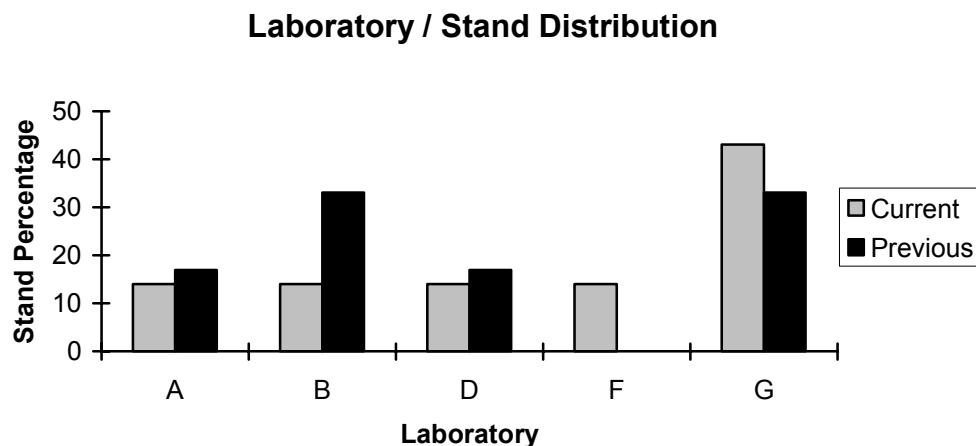

The table below summarizes the status of the reference oil tests reported to the TMC this ASTM report period:

Test Status	TMC Validity Code	Number of Tests
Acceptable Calibration Test	AC	9
Failed Calibration Test (LTMS Criteria)	OC	0
Operationally Invalid Calibration Test	LC	0
Aborted Calibration Test	XC	3
Total		12

Calibrations per start, lost tests per start and rejections per start rates are summarized in the figure below:

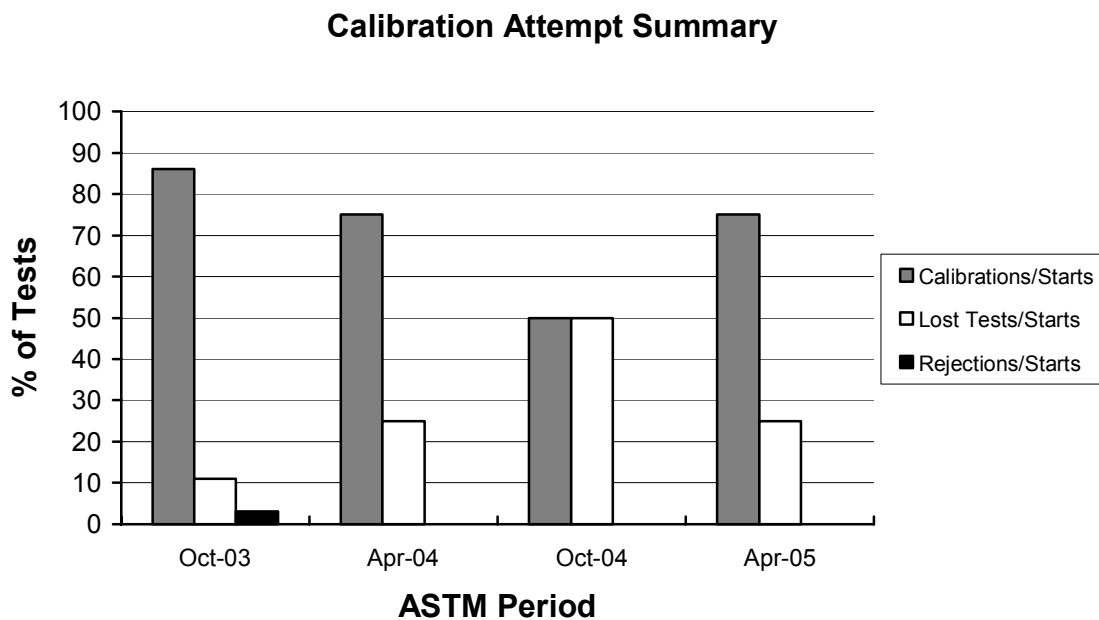

A detailed list of reasons tests failed the acceptance criteria (OC validity) is shown in Table 1. Table 2 lists the operationally invalid tests (LC validity) and Table 3 lists the aborted tests (XC validity).


Severity and Precision:

Figure 1 (attached) shows the current industry EWMA severity, EWMA precision, and cusum charts for Soot at 12 cSt Viscosity Increase (SOOT). SOOT is currently in an industry action alarm in the mild direction. For this period, SOOT is trending an average of 0.61 Δ/s mild, which is approximately 0.13 SOOT %. For a history of SOOT industry alarms, refer to the industry alarm log shown in Table 4.


Figure 2 (attached) shows the current industry EWMA severity, EWMA precision, and cusum charts for MRV Viscosity (MRV). MRV is currently in industry action alarm for severity (in the severe direction) and an industry warning alarm for precision. For this period MRV is trending an average of 1.28 Δ/s severe, which is approximately 1400 cP. For a history of MRV industry alarms, refer to the industry alarm log shown in Table 5.

Precision, as estimated by the pooled standard deviation, is shown in the following figures. For comparison purposes, the TMC will continue to report precision by ASTM period. Precision for SOOT shows improvement compared to previous periods. Precision for MRV shows a return to historical levels.

**SOOT Pooled Precision**

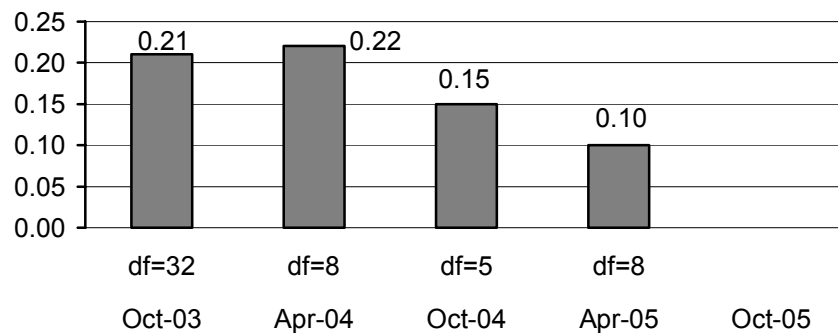

**MRV Viscosity Pooled Precision**

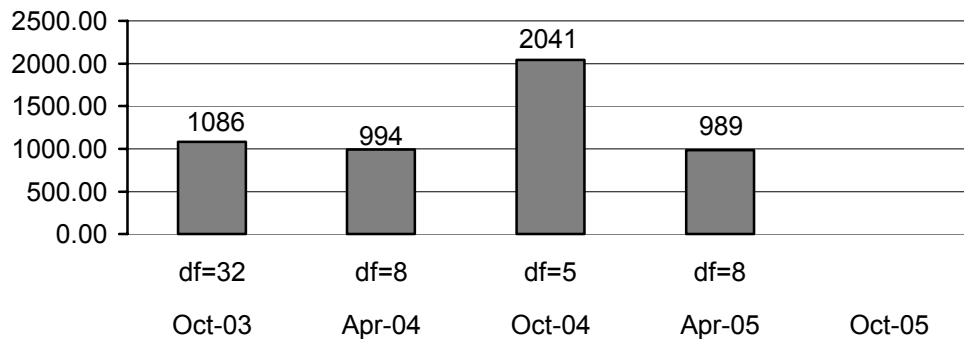

Please note, that the degrees of freedom (df) equals Σ(n observations per oil - 1).

Reference Oils:

The current reference oil test targets are shown below:

Oil	N	Parameter	Mean (cSt)	s
820-2	32	SOOT	5.78	0.21
		MRV	14969	1097

Information Letters:

No information letters were issued this ASTM period.

TMC Laboratory Visits:

No TMC laboratory visits were conducted this ASTM period.

LTMS Deviations

No LTMS deviations were issued this period. No LTMS deviations have been issued during the history of the T-11.

Quality Index:

No Quality Index deviations were issued this ASTM period. For the history of the T-11, no Quality Index deviations have been issued.

Additional Information:

The T-11 test procedure is now available as ASTM D 7156.

Table 6 contains the T-11 Timeline which details changes to the test since its inception.

The T-11 database can be accessed on the TMC's homepage. If you have any questions on how to access this information, contact the TMC.

JAC/jac/mem05-050.jac.doc

## Attachments

c: J.L. Zalar, TMC  
 F.M. Farber, TMC  
 Mack Surveillance Panel  
<ftp://ftp.astmtmc.cmu.edu/docs/diesel/mack/semiannualreports/T11-04-2005.pdf>

Distribution: Email

**Table 1**  
**Summary of Reasons for Rejected Tests**

	No. of Tests
No rejected tests	-

**Table 2**  
**Summary of Reasons for Invalid Tests**


	No. of Tests
No invalid test	-

**Table 3**  
**Summary of Reasons for Aborted Tests**

	No. of Tests
Engine damage	1
Coolant leak into test oil	1
Missed soot window	1

# FIGURE 1 T-11 INDUSTRY OPERATIONALLY VALID DATA

## SOOT AT 12 cSt

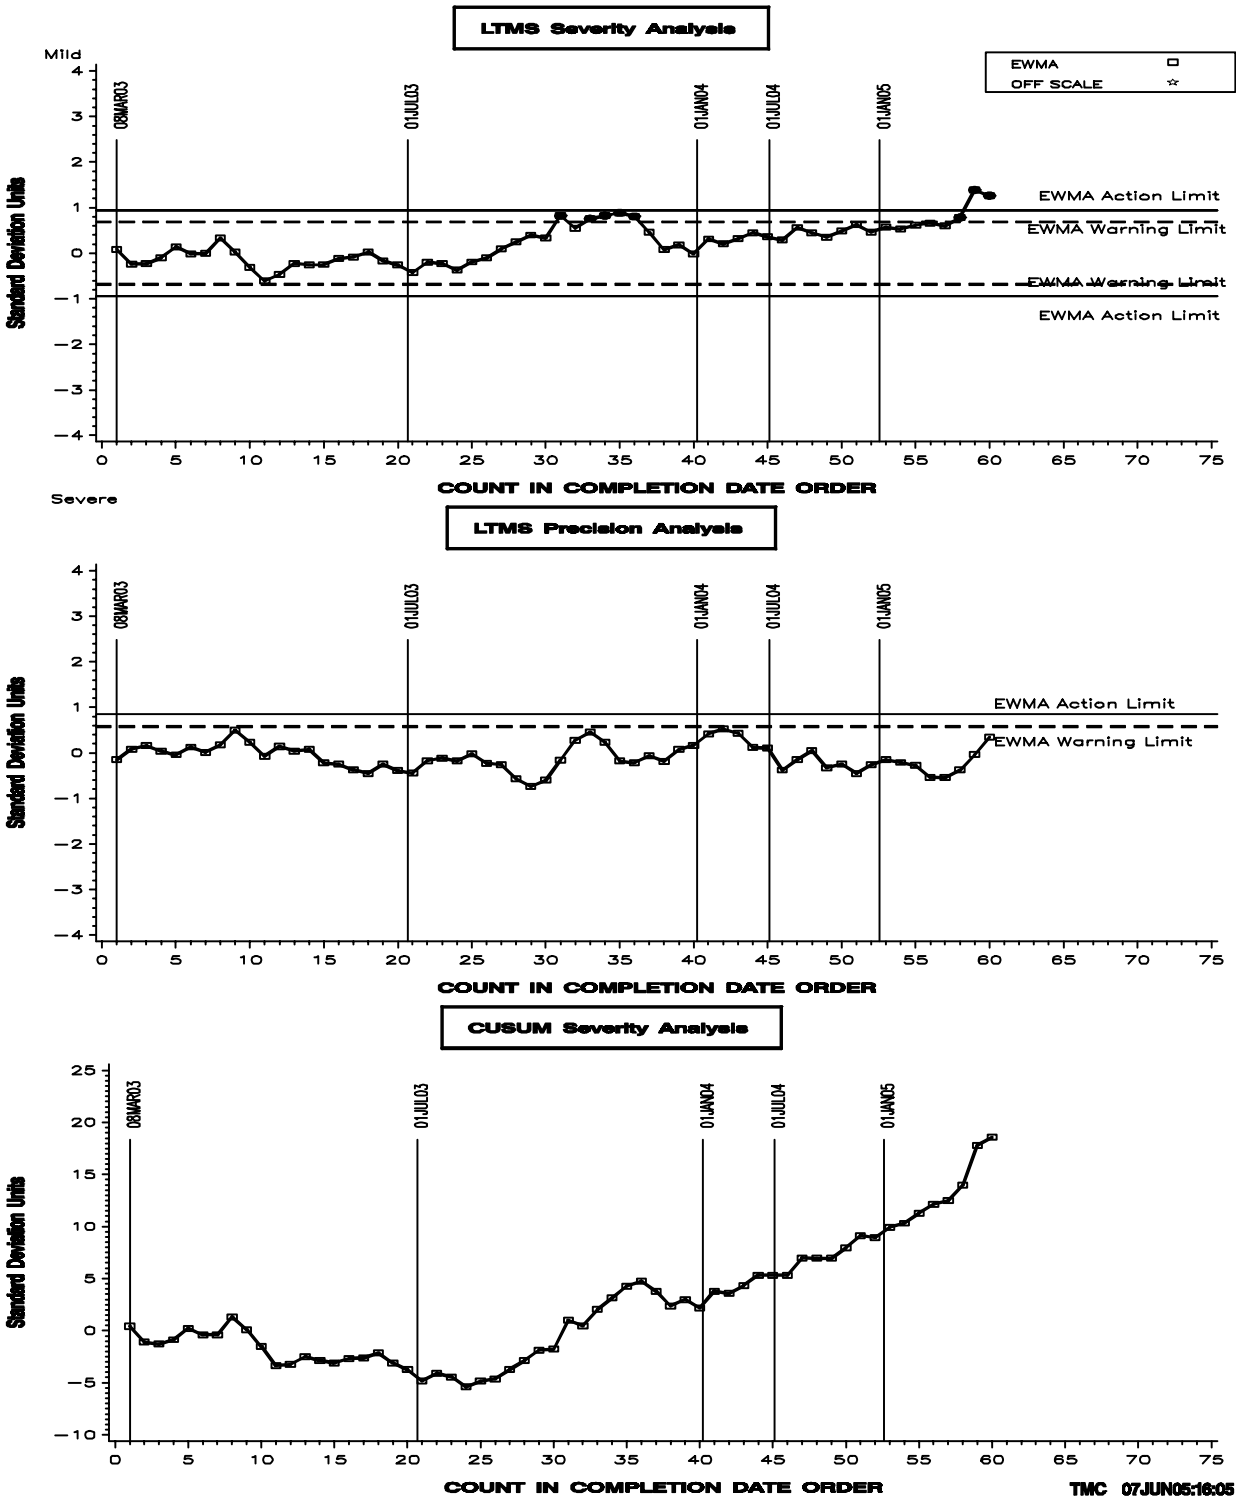

**TABLE 4**  
**SOOT AT 12 cSt INDUSTRY ALARM LOG**

**April 26, 2003 to April 29, 2003 (Precision)**

A one-test excursion occurs. No industry related problem.

**August 11, 2003 to November 3, 2003 (Severity, Mild direction)**

Five of six tests trigger an industry warning alarm. No cause was apparent and the alarm cleared without any action being taken by the surveillance panel.




**April 19, 2005 to Date (Severity, Mild direction)**

Three tests trigger an industry action alarm. This appears to be the continuation of a gradual mild trend dating back to early 2004. The surveillance panel is investigating an increase in oil consumption that has occurred in the same time frame. New hardware is currently being tested as a possible solution to these trends.

Updated 6/7/05

**FIGURE 2**  
**T-11 INDUSTRY OPERATIONALLY VALID DATA**

**MRV VISCOSITY**

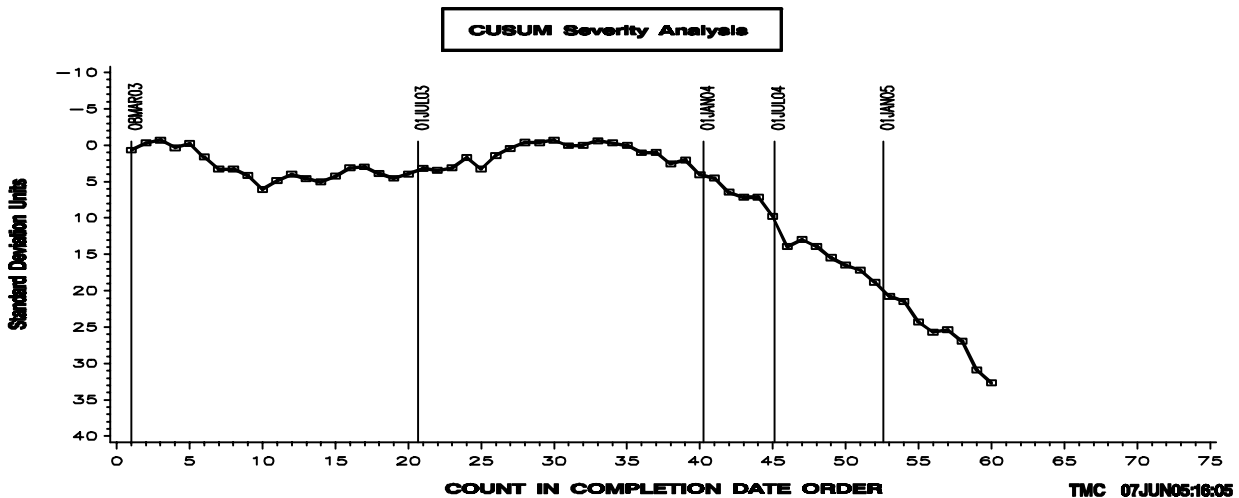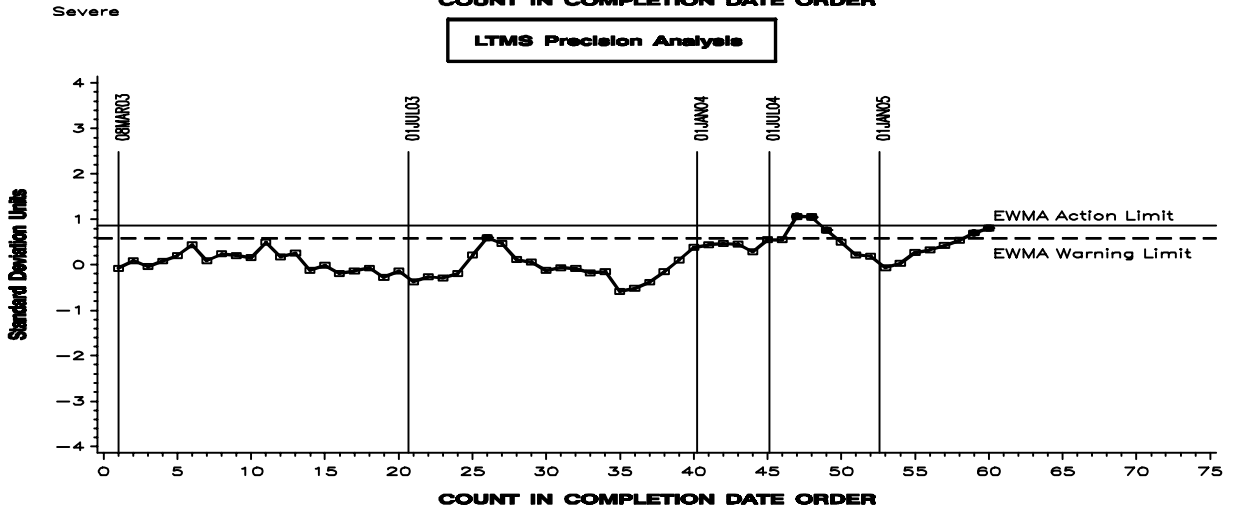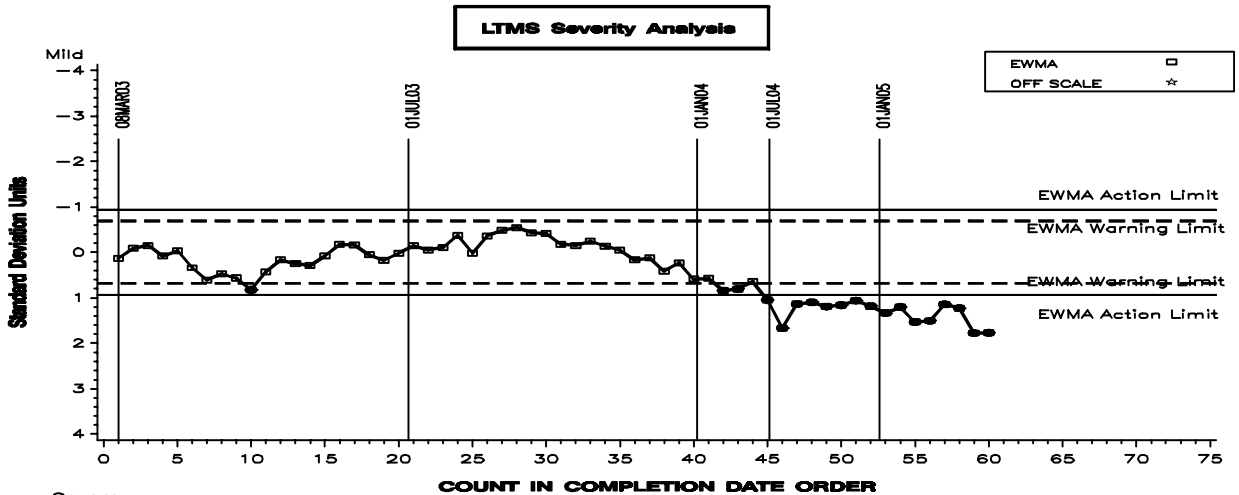



**TABLE 5**  
**MRV VISCOSITY INDUSTRY ALARM LOG**

**April 26, 2003 to April 29, 2003 (Severity, Severe direction)**

A one-test excursion occurs. No industry related problem.

**July 19, 2003 to July 21, 2003 (Precision)**

A one-test excursion occurs. No industry related problem.

**March 12, 2004 to Date (Severity, Severe direction; Precision)**

This severe trend appears goes back to early 2004. The surveillance panel is investigating an increase in oil consumption that has occurred in the same time frame. New hardware is currently being tested as a possible solution to these trends.

Updated 6/7/05

## TABLE 6

*T11 Timeline*

07:48 Monday, June 6, 2005 1

Obs	effective_date	info_letter_number	event
1	20030221		Draft 1 of test procedure issued
2	20030303		Oil sump configuration specified
3	20030313		Draft 2 of test procedure issued
4	20030422		Oil sample location specified as the pre-oil filter pressure port
5	20030709		Draft 3 of test procedure issued
6	20030714		Calibration period set to six months or six tests (1512 test hours)
7	20030717		Draft 4 of test procedure issued
8	20030821		Oil consumption limit of 65 g/hr maximum, using 25-h to EOT regression slope
9	20030821		LTMS implemented
10	20030905		Third soot window moved from EOT to 228 hours
11	20030918		Draft 5 of test procedure issued
12	20030923		Report Forms and Data Dictionary Version 20030819
13	20031205		Report Forms and Data Dictionary Version 20031029
14	20040415		Intake Manifold Pressure specification set to 140 kPa minimum.
15	20040504		Draft 6 of test procedure issued
16	20050511		GB3133 VALVE GUIDES INTRODUCED
17	20050603		Test procedure available as ASTM D 7156