

**Test Monitoring Center** 

Carnegie Mellon University 6555 Penn Avenue, Pittsburgh, PA 15206, USA http://astmtmc.cmu.edu 412-365-1000


MEMORANDUM:	08-074
DATE:	December 5, 2008
TO:	Don Bartlett, Chairman, L-37 Surveillance Panel
FROM:	Donald Lind
SUBJECT:	L-37 Rater Calibration Status from April 1, 2008 through September 30, 2008

The following is a summary of the L-37 rater calibrations reported to the Test Monitoring Center during the period April 1, 2008 through September 30, 2008.

#### Rater Summary

	Reporting Data	Calibrated as of 9/30/08
Number of Raters	8	7

The following chart shows the laboratory/rater distribution:

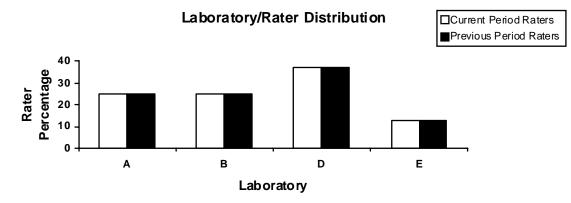

The following summarizes the status of the rater calibration tests reported to the TMC:

	TMC Validity Codes	No. of Calibrations
Statistically Acceptable	AC	8
Failed Acceptance Criteria	OC	0
Total		8

Memo 08-074 Page 2

#### Summary

A total of eight L-37 rater calibration results from eight different raters were reported to the TMC this period. All eight raters were within the acceptance criteria with their first set of pinions. Two of the eight raters had their calibration period reduced to half (3 months) due to triggering an EWMA severity alarm. Seven of the eight raters are currently calibrated.

A detailed list of reasons tests failed the acceptance criteria are shown in Table 1. The following charts summarize these reasons with a breakdown by parameter of the failed tests.

### **Distribution of RCMS Rater Alarms**





There were no RCMS deviations written this period.

#### Severity and Precision

For this period, the mean delta/s was -0.06 severe for Wear, -0.27 severe for Rippling, -0.31 severe for Ridging, and -0.03 severe for Spitting. Precision was 0.59 for Wear, 0.60 for Rippling, 0.68 for Ridging, and 0.44 for Spitting. A straight standard deviation of Yi was used because the number of ratings per pinion was too small to determine a pooled standard deviation. Below is a table illustrating rater severity for this report period:

Rater	Wear		Rippling		Ridging		Spitting	
	Yi	S.D. *	Yi	S.D. *	Yi	S.D. *	Yi	S.D. *
В	0.17	0.34	0.52	0.48	0.15	0.54	0.16	0.24
D	-0.25	0.44	-0.28	0.58	-0.75	0.44	-0.14	0.21
Е	-0.20	0.81	-0.53	0.29	-0.05	0.84	0.10	0.73
Н	0.15	0.61	-0.28	0.84	-0.77	0.26	0.17	0.48
Ι	-0.13	0.91	-0.54	0.44	-0.75	0.44	-0.25	0.44
Κ	0.29	0.47	-0.57	0.47	0.32	0.85	0.00	0.08
М	-0.37	0.61	-0.60	0.35	0.03	0.67	-0.22	0.48
Ν	-0.14	0.61	0.13	0.57	-0.69	0.25	-0.06	0.67

\*A straight standard deviation of Yi was used as the number of ratings per pinion was too small to determine a pooled standard deviation.

Memo 08-074 Page 3

### Industry Control Charts

Figures 1 through 4 are the L-37 rater industry control charts for pinion Wear, Rippling, Ridging, and Spitting, respectively. Figures 5 through 8 are the rater industry control charts of the last 30 test results for pinion Wear, Rippling, Ridging, and Spitting, respectively. Severity EWMA charts for pinion Wear and Spitting were in control this report period. Severity EWMA charts for pinion Rippling and Ridging triggered one alarm each. The alarms do not appear to be related to any one pinion or rater. Precision EWMA charts for pinion Wear, Rippling, Ridging, and Spitting were in control this report period.

Attachments

c: L-37 Surveillance Panel

L-37 Rater Task Force

J. L. Zalar

F. M. Farber

ftp://ftp.astmtmc.cmu.edu/docs/rater\_calibration/137rc-04-2008.pdf

Distribution: Email

#### Listing of Tables and Figure Included as Part of This Report to the L-37 Rater Calibration Report

Table 1 is a Detailed List Summarizing the Reasons for Failed Tests
Figure 1 is the L-37 Rater Industry Control Charts for Pinion Wear
Figure 2 is the L-37 Rater Industry Control Charts for Pinion Rippling
Figure 3 is the L-37 Rater Industry Control Charts for Pinion Ridging
Figure 4 is the L-37 Rater Industry Control Charts for Pinion Spitting
Figure 5 is the L-37 Rater Industry Control Chart of the last 30 test results for Pinion Rippling
Figure 6 is the L-37 Rater Industry Control Chart of the last 30 test results for Pinion Rippling
Figure 7 is the L-37 Rater Industry Control Chart of the last 30 test results for Pinion Rippling
Figure 8 is the L-37 Rater Industry Control Chart of the last 30 test results for Pinion Rippling

## Table 1

## Summary of Alarms This Period

Lab	Rater	Reason
D	М	Rippling EWMA Severity (Calibration Period Reduced to Half, 3 Months)
D	D	Wear EWMA Severity (Calibration Period Reduced to Half, 3 Months)

