




Test Monitoring Center

Carnegie Mellon University
6555 Penn Avenue, Pittsburgh, PA 15206, USA


<http://astmtmc.cmu.edu>
412-365-1000

MEMORANDUM: 10-059
 DATE: November 23, 2010
 TO: Cory Koglin, Chairman, L-42 Surveillance Panel
 FROM: Scott Parke 
 SUBJECT: L-42 Testing from April 1, 2010 through September 30, 2010

A total of 24 L-42 tests were reported to the Test Monitoring Center during the period from April 1, 2010 through September 30, 2010. Following is a summary of testing activity this period.

| | Reporting Data | Calibrated on 9-30-10 |
|------------------|----------------|-----------------------|
| Number of Labs | 2 | 2 |
| Number of Stands | 2 | 2 |


BY-LAB STAND DISTRIBUTION

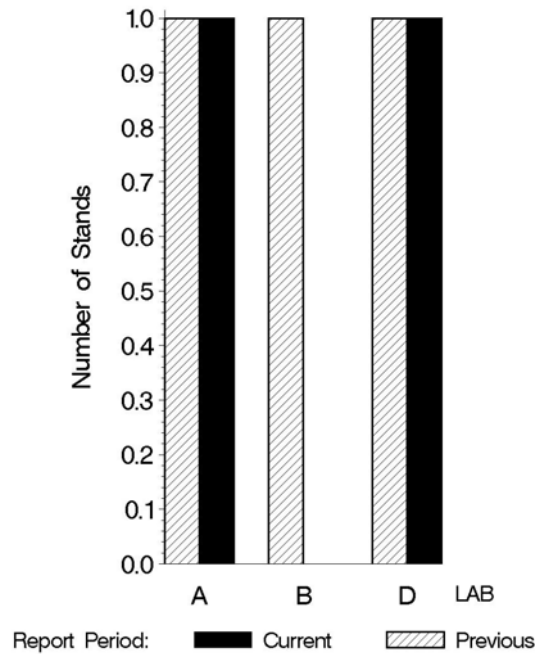


Test Distribution by Oil and Validity

| | | | | | | Totals | |
|---------------------------|----|----------|----------|----------|-----------|-------------|-------------|
| | | 112-2 | 113 | 116 | 116-1 | Last Period | This Period |
| Accepted for calibration | AC | 0 | 0 | 1 | 15 | 24 | 16 |
| Rejected (Mild) | OC | 0 | 0 | 0 | 0 | 0 | 0 |
| Rejected (Severe) | OC | 0 | 0 | 0 | 0 | 0 | 0 |
| Rejected (Precision) | OC | 0 | 0 | 0 | 0 | 0 | 0 |
| Accepted discrimination | AS | 1 | 0 | 0 | 0 | 4 | 1 |
| Unaccepted discrimination | MS | 0 | 0 | 0 | 0 | 0 | 0 |
| Invalidated calibration | LC | 0 | 0 | 0 | 0 | 0 | 0 |
| Aborted | XC | 0 | 0 | 0 | 0 | 0 | 0 |
| Uninterpretable | MC | 0 | 0 | 0 | 2 | 1 | 2 |
| Aborted donated test | XG | 0 | 0 | 0 | 0 | 0 | 0 |
| Accepted information run | NN | 0 | 0 | 0 | 5 | 1 | 5 |
| Total | | 1 | 0 | 1 | 22 | 30 | 24 |

CALIBRATION ATTEMPT SUMMARY

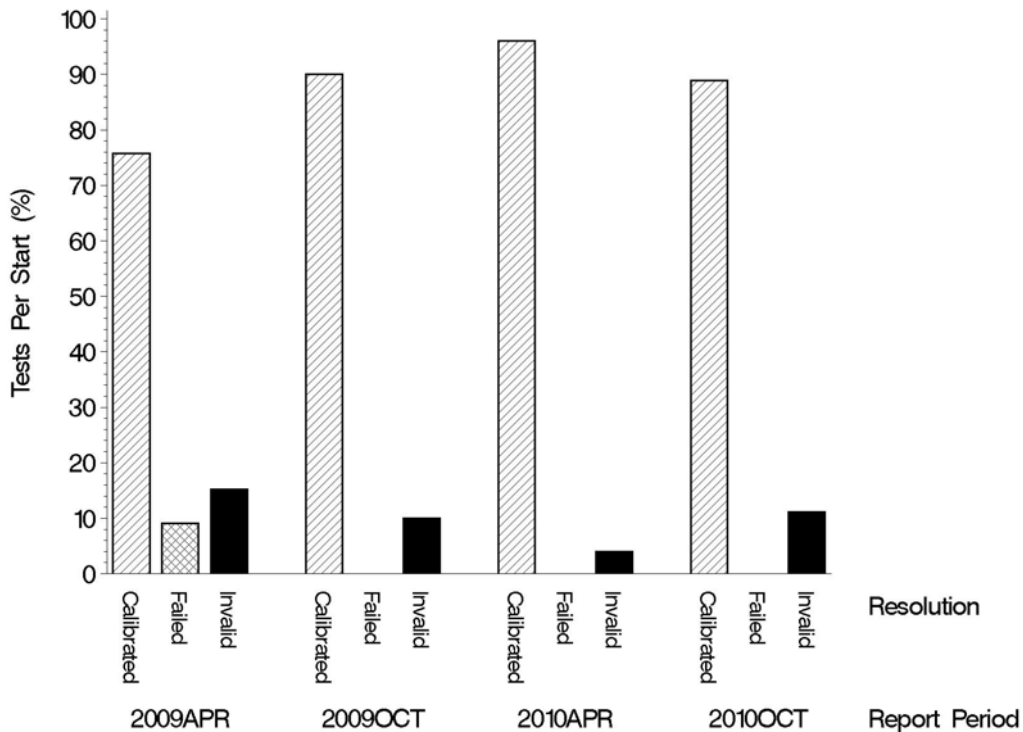

OPERATIONALLY VALID TESTS
MEETING ACCEPTANCE CRITERIA

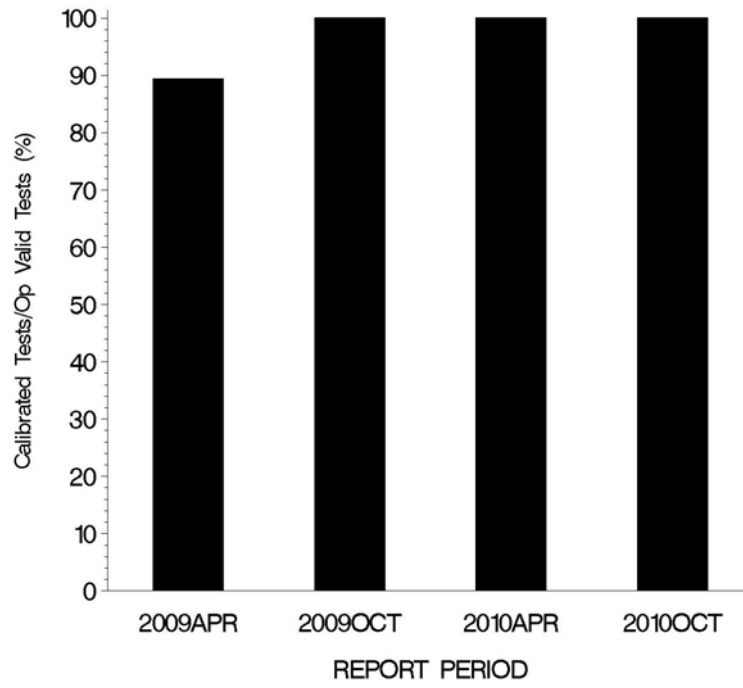

CAUSES FOR LOST TESTS:

| Lab | Cause | Oil | | | | Validity | | | Loss Rate | | |
|-----|--------------------------------|-------|-----|-----|-------|----------|-----|----|-----------|--------|-----|
| | | 112-2 | 113 | 116 | 116-1 | LC | MC | XC | Lost | Starts | % |
| A | Ring scoring > pinion scoring. | | | | ● | | ● | | 2 | 12 | 17% |
| | Ring scoring > pinion scoring. | | | | ● | | ● | | | | |
| | Lost | 0 | 0 | 0 | 2 | 0 | 2 | 0 | | | |
| | Starts | 1 | 0 | 1 | 22 | 24 | 24 | 24 | | | |
| | % | 0% | 0% | 0% | 9% | 0% | 33% | 0% | | | |

Lost tests are calibration attempts that were either aborted or operationally invalid.

| | | | Coast Side Pinion Scoring | | |
|-------|---------------|----|---------------------------|-----------|--------------------|
| Oil | Gear Batch | N | Mean | Std. Dev. | Average Δ/s |
| 116 | C1L446/P8L119 | 1 | 26 | 0.00 | 0.55 |
| 116-1 | C1L446/P8L119 | 15 | 21.5 | 4.09 | -0.27 |




| | | Pooled Standard Deviation | | | |
|-----|--------------------------------------|---------------------------|---------------------------|-------------------------|--|
| Lab | Coast Side Pinion Scoring Δ/s | df | Coast Side Pinion Scoring | Coast Side Ring Scoring | Shock Series I Coast Side Ring Scoring |
| A | -0.58 | 8 | 3.22 | 3.47 | 3.33 |
| D | 0.39 | 5 | 1.94 | 1.83 | 0.00 |

INDUSTRY CONTROL CHART:

The industry control chart is shown on the following page. ECSP severity and precision are both currently performing within limits.

L-42 INDUSTRY OPERATIONALLY VALID DATA

FINAL EOT PINION SCORING COAST SIDE

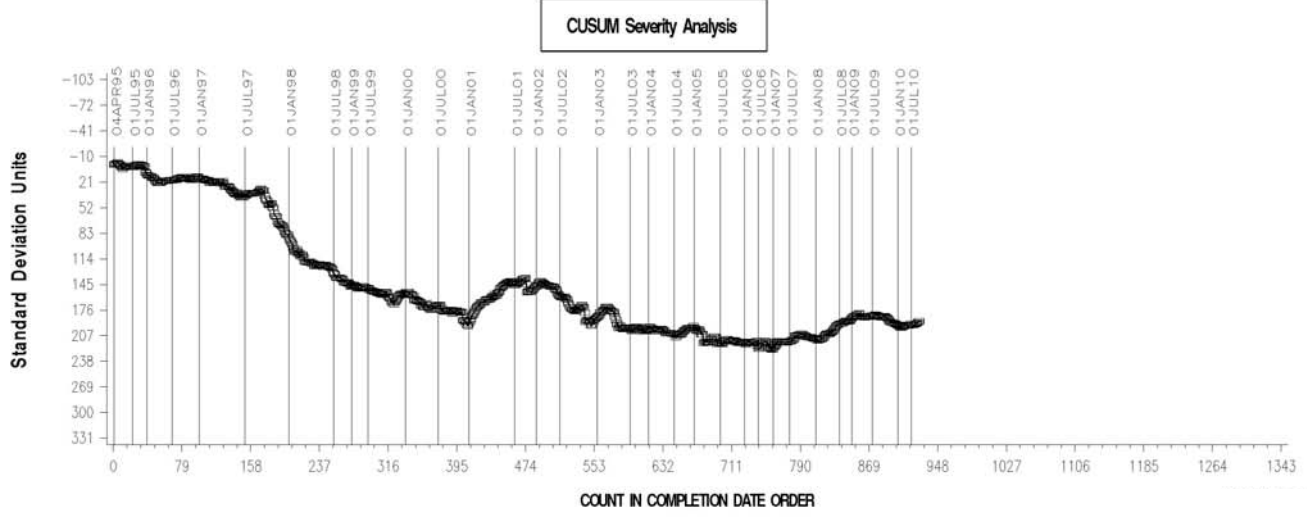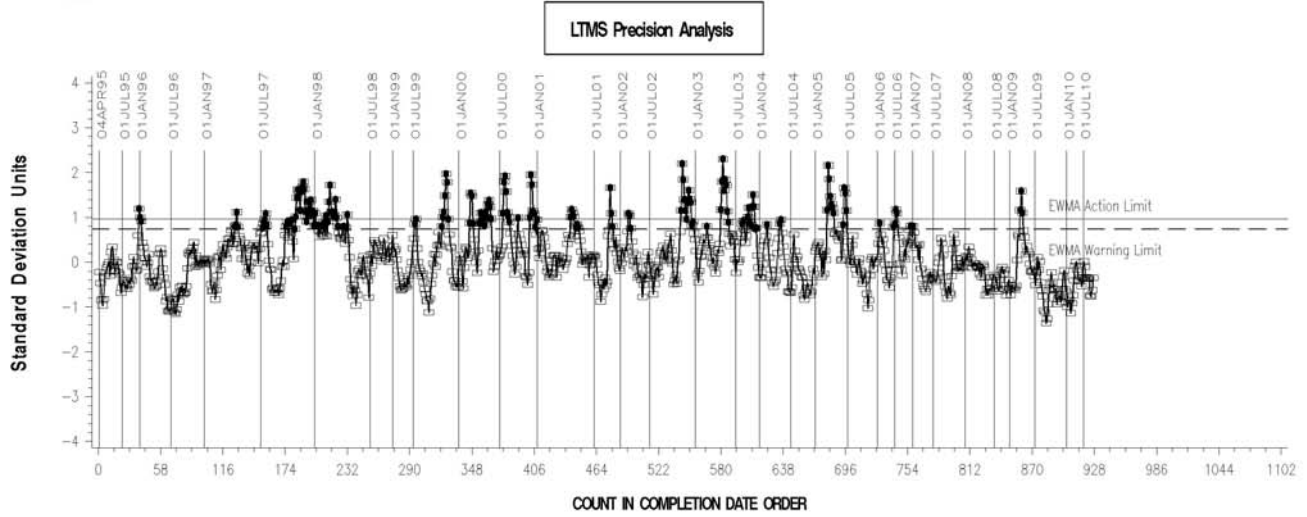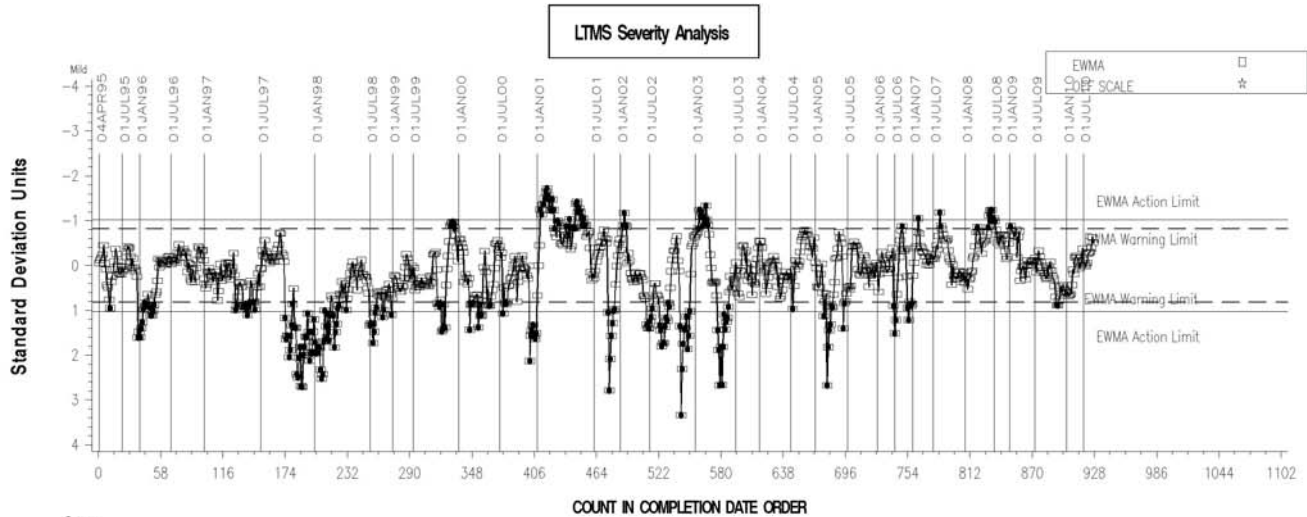

TIMELINE OF SIGNIFICANT EVENTS IN THE HISTORY OF THE L-42 TEST:

| Effective Date | Information Letter | Event |
|----------------|--------------------|---|
| | 98-3 | Section 5.2.4 editorial correction (No effective date, only a editorial change) |
| 19940110 | 1 | test report form and data dictionary changes version number 19940106 |
| 19940401 | 2 | In-Line Torque Meter Addition |
| 19940401 | 2 | Instrument Calibration Requirement |
| 19940701 | 3 | Report Forms and Data Dictionary Version 19940526 |
| 19940903 | 4 | Report Forms and Data Dictionary Version 19940707 |
| 19940903 | 5 | Recording of Torque Measurement using Inline Torque Meter |
| 19950824 | 5 | Report Forms and Data Dictionary Version 19950721 |
| 19960713 | 96-1 | Test Break-in Procedure |
| 19960713 | 96-1 | Report Forms and Data Dictionary Version 19960607 |
| 19960923 | 96-2 | Non-reference oil test sequence 2 (15%0 and sequence 4 (10%) coast side torque limits. |
| 19960923 | 96-2 | Sequence 2 and sequence 4 dynamometer synchronization torque specification |
| 19970310 | 97-1 | Revised Cal. Schedule, Discrimination Test Req., Seq. 2 and 4 Coast Side Torque Req. |
| 19970310 | 97-1 | Report Form And Data Dictionary Revisions (Version 19970305) |
| 19980122 | 98-2 | Backlash setting clarifications |
| 19980302 | 98-1 | Revised Report Forms & Data Dictionary Version 19971211 |
| 19990101 | 98-4 | Addition of CRC Gear Rating Workshop training |
| 19990901 | 99-1 | Reference test requirement: EOT pinion c.s. scoring => EOT ring c.s. scoring |
| 20020211 | 02-1 | Replacement of CRC Manual 17 With CRC Manual 21 |
| 20020401 | 02-1 | Removal of Report Forms and Data Dictionary |
| 20030101 | 03-1 | Himmelstein Torque Meter Requirement |
| 20030101 | 03-1 | Himmelstein Model 701 or 711 Strain Gage Conditioner Requirement |
| 20030415 | 03-2 | Non-interpretable Tests |
| 20030415 | 03-2 | Complete L-42 Test Procedure Update |
| 20031114 | 03-4 | Non-interpretable Tests for Drive Side Scoring |
| 20040101 | 03-3 | Revised Solvent Specification |
| 20040630 | 04-1 | Standardization Revisions |
| 20040825 | 04-1 | Lubrited Hardware, Gear Batch V1L686/P4L626A Correction Factor |
| 20040917 | 04-1 | Intermediate Precision and Reproducibility Revisions |
| 20040922 | 04-2 | Drive Shaft Wall Thickness |
| 20040922 | 04-2 | Alternating Lubrited and Non-lubrited Hardware |
| 20050221 | 05-1 | Revised Silvent Specifications |
| 20050426 | 05-2 | Updated Test Precision |
| 20050426 | 05-2 | Rounding Test Results Using ASTM E 29 |
| 20050629 | 05-3 | Low Temperature Test Annex |
| 20060301 | 06-1 | Addition of Alternative Power Train |
| 20060509 | 06-2 | Revised Procedure Includes Single Common Power Train, Common Throttle Control, and Revised Data Acquisition Requirements |
| 20060713 | 06-3 | Revised Procedure Includes Revisions to Test Length Requirements, Unscheduled Shutdowns, Backlash Measurements, and Pretest Contact Patterns. |
| 20061215 | 06-4 | Revised Wording for Coast Side Gear Contact Segment Time |
| 20061215 | 06-4 | Revised Wording for Unscheduled Shutdowns |

| Effective Date | Information Letter | Event |
|-----------------------|---------------------------|--|
| 20061215 | 06-4 | Engine Throttle Body Calibration Procedure |
| 20070115 | 06-4 | Revised Wording for Backlash Measurements |
| 20070411 | 07-1 | Revised Wording for Backlash Measurements |
| 20070411 | 07-1 | Revised Pretest Contact Pattern Procedure |
| 20080624 | 08-1 | Revised EOT Scoring Validity |
| 20080724 | 08-1 | Revised Conditioning Graphs |
| 20090326 | 09-1 | Revisions to Preparation of Apparatus Procedure |
| 20090326 | 09-1 | Revision to Percent Deviation Calculation |
| 20091202 | 09-2 | Cal stands @ 20 tests; cal instrumentation @ 6 mo or 60 tests. |

TMC LAB VISITS:

One L42 lab visit was conducted during this report period. No noteworthy deviations from procedure were discovered.

INFORMATION LETTERS:

No information letters were issued this period.

STATUS OF REFERENCE OIL SUPPLY:

At the end of this report period, the testing oil supply stood as outlined in the table below:

| Oil | Cans @ Labs | @ TMC | |
|-------|-------------|-------|---------|
| | | Cans | Gallons |
| 112-2 | 7 | 19 | 9.5 |
| 113 | 11 | 176 | 88.0 |
| 116 | 11 | 0 | 0.0 |
| 116-1 | 31 | 233 | 116.5 |
| Total | 60 | 428 | 214.0 |

SDP/sdp/astm1010.doc/mem10-059.sdp.doc

cc: Frank Farber

Jeff Clark

Don Lind

L-42 Surveillance Panel

<ftp://ftp.astmtmc.cmu.edu/docs/gear/l42/semiannualreports/l42-10-2010.pdf>

Distribution: email