

**D 6750**  
**1K/1N Final Report Cover**

**Method**  
**Version**

**Conducted For:**

	<b>V</b> = Valid
	<b>I</b> = Invalid
	<b>N</b> = Results Can Not Be Interpreted As Representative of Oil Performance (Non-Reference Oil) and Shall Not Be Used For Multiple Test Acceptance Criteria.

	<b>RO</b> = Reference Oil Test
	<b>NR</b> = All Other Tests

	Was This Test Run Under a Valid Calibration? (Y/N)
--	--

	Lab Is Currently Operating Under An LTMS Precision Alarm *
	Stand Is Currently Operating Under An LTMS Precision Alarm *

\* Check box only if YES

<b>Test Number</b>	
Test Stand:	Engine Run #:
EOT Time:	EOT Date:
Oil Code <sup>A</sup> :	
Formulation/Stand Code:	
Alternate Codes:	

In my opinion this test \_\_\_\_\_ been conducted in a valid manner in accordance with ASTM Test Method D 6750 (1K/1N) and the appropriate amendments through the information letter system. The remarks included in this report describe the anomalies associated with this test.

<sup>A</sup> CMIR or Non-Reference Oil Code

Submitted By: \_\_\_\_\_

Testing Laboratory

Signature

Typed Name

Title

**1K/1N  
Form 1  
Test Report Summary**

Lab	EOT Date	EOT Time	Method
Stand	Run Number		
Formulation/Stand Code			
Oilcode			
Start Date	Total Test Length	TMC Oil Type	
Laboratory Internal Oil Code			
Number of Test Starts Since Stand Calibration <sup>A</sup>			

	Correction Effective Date	WDK/WDN	TGF %	TLHC%	BSOC g/KW-h	EOTOC g/kW-h
Original Result						
Transformed Result						
Correction Factor						
Corrected Transformed Result						
Severity Adjustment(If Any) <sup>B</sup>						
Final Transformed Result						
Final Result						

	Effective Date	WDK/WDN	TGF %	TLHC %	BSOC g/KW-h	EOTOC g/kW-h
Test Target Mean <sup>B</sup>						
Test Target STD <sup>B</sup>						
C, D						

	Referee Lab	WDK/WDN	TGF %	
Referee Ratings				

	Top	Int. 1	Oil	Piston	Liner
Ring Loss Of Side Clearance(mm)					
Ring End Gap Increase (mm)					
Is The Ring Stuck?					
Scuffed Area %					
Average Wear Step (mm)					
% Bore Polish					

- Notes:
- <sup>A</sup> Non-reference tests only, includes current test
  - <sup>B</sup> Reference oil tests or as requested by test sponsor
  - <sup>C</sup> Non-reference oil tests only
  - <sup>D</sup> See Appendix X4

**1K/1N  
Form 2  
Operational Summary**

Lab	EOT Date	EOT Time	Method
Stand	Run Number		
Formulation/Stand Code			
Oilcode			
<b>Operating Condition</b>	<b>Units</b>	<b>Minimum</b>	<b>Maximum</b>
Engine Speed	r/min		
Engine Power	kW		
Fuel Flow	g/min		
Humidity	g/kg		
			2100 ± 10
			Report
			185 ± 1
			17.8 ± 1.7
<b>Temperature °C</b>			
Coolant Out	°C		
Coolant In	°C		
Coolant delta T	°C		
Oil To Bearing	°C		
Oil Cooler In	°C		
Inlet Air	°C		
Exhaust	°C		
Fuel @ Injector Housing	°C		
			93 ± 2.5
			Report
			5 ± 1.0
			107 ± 2.5
			Report
			127 ± 2.5
			550 ± 30
			57 + 3
<b>Pressures</b>			
Oil To Bearing	kPa		
Oil To Jet	kPa		
Inlet Air	kPa		
Exhaust (ABS)	kPa		
Fuel @ Filter HSG	kPa		
Crankcase Vacuum	kPa		
Coolant Jug Pressure	kPa		
			482 Max
			360 ± 13
			240 ± 1
			216 ± 1
			210 ± 20
			0.7 ± 0.1
			Report
<b>Flows</b>			
Blowby	L/min		
Coolant Flow	L/min		
			Report
Air/Fuel Ratio: 24 hr.		Air/Fuel Ratio: 252 hr.	
			65 ± 2
<b>Assembly Measurements And Parts Record</b>			
Piston/Head Clearance mm		Intake Valve Open °ATC	
		Fuel Timing °BTC	
	Liner	Piston	Ring Pack
Part #			
Serial #			
Part Date Code			
Box Date Code			
Supplier/Inspection Code			

<sup>D</sup> Number below "E" located on top of piston <sup>E</sup> Number on top of "E" located on top of piston <sup>F</sup> Four alphanumeric characters (NNAN) on liner O.D. <sup>G</sup> Four digit number on liner O.D. <sup>H</sup> Three or four digit number on white label on ring set box <sup>I</sup> NN-NN from part number label on ring set box

(1) And (2) Number On Parts Box Yellow Label

**1K/1N  
Form 3  
Operational Summary - Offset And Deviation**

Lab	EOT Date	EOT Time	Method
Stand	Run Number		
Formulation/Stand Code			
Oilcode			

Controlled Parameter	Allowable % Out	This Test % Out	Allowable % Off	This Test % Off
Speed	5		20	
Fuel Flow	10		25	
Humidity	10		25	
Coolant Flow	5		25	
<b>Temperatures</b>				
Coolant Out	5		20	
Oil To Bearing	5		20	
Intake Air	5		20	
Fuel At Injector Housing	5		20	
<b>Pressures</b>				
Oil Jet	5		25	
Intake Air	10		25	
Exhaust	10		25	
Fuel At Filter Housing	5		20	
Crankcase Vacuum	10		20	

**1K/1N  
Form 4  
Piston Rating Summary**

Test	Lab	EOT Date	EOT Time	Stand	Run No.	Method
Formulation/Stand Code					Oilcode	
Test Fuel		Fuel Batch		Date Rated		Rating Number
Last Stand Reference Information		Date Completed		Stand No.	Run No.	
		WDK/WDN	TGF	TLHC	Transformed TLHC	TMC Oil Code
Last Ref. This Stand					BSOC	EOTOC
Industry Average						
Industry STD						

Total Piston Ratings Summary																					
	Dep. Factor	Grooves						Lands						Upper Skirt		Under Crown		Pin Bores			
		NO. 1		NO. 2		NO. 3		NO. 1		NO. 2		NO. 3		A,%	Dem.	A,%	Dem.	Front		Rear	
		A,%	Dem.	A,%	Dem.	A,%	Dem.	A,%	Dem.	A,%	Dem.	A,%	Dem.					A,%	Dem.	A,%	Dem.
<b>C A R B O N</b>																					
	HC-1.0																				
	MC-0.5																				
	LC-.25																				
	Total																				
<b>L A C Q U E R</b>	8 - 9																				
	7 - 7.9																				
	6 - 6.9																				
	5 - 5.9																				
	4 - 4.9																				
	3 - 3.9																				
	2 - 2.9																				
	1 - 1.9																				
	>0 - 0.9																				
	Clean		0		0		0		0		0		0		0		0		0		0
Total																					
Rating																					
Location Factor	1.5		1.5		25		1		1		25		50		20		0		0		
Weighted Rating																					
<b>TGF %</b>		<b>Intermediate Groove Fill %</b>				<b>WDK/WDN</b>				<b>Unweighted Deposit</b>				<b>T.L. Heavy Carbon %</b>				<b>T.L. Flaked Carbon %</b>			

**1K/1N**  
**Form 4A**  
**Piston Rating Worksheet**

Lab	EOT Date	EOT Time	Method
Stand	Run Number		
Formulation/Stand Code			
Oilcode			

Refer to Appendix C for an example of Piston Rating Worksheet.

**1K/1N**  
**Form 5**  
**Supplemental Piston Deposits(Groove Sides And Rings)**

Lab		EOT Date				EOT Time				Method				
Stand						Run Number								
Formulation/Stand Code														
Oilcode														
Deposit Type			Carbon			Varnish								
			HC	MC	LC	8-9	7-7.9	6-6.9	5-5.9	4-4.9	3-3.9	2-2.9	1-1.9	>0-
<b>Groove Top And Bottom</b>	1	T												
		B												
	2	T												
		B												
	3	T												
		B												
<b>Top Bottom And Back Of Rings</b>	1	T												
		B												
		BK												
	2	T												
		B												
		BK												
	3	T												
		B												
		BK												
Additional Deposit & Condition Ratings														
Piston Crown														
Rings														
Liner														













**1K/1N  
Form 8  
Ring Measurements**

Lab	EOT Date	EOT Time	Method
Stand	Run Number		
Formulation/Stand Code			
Oilcode			

Ring Gaps (mm)	Top	Intermediate	Oil
<b>Specifications</b>	$0.724 \pm 0.076$ mm	$0.673 \pm 0.076$ mm	$0.572 \pm 0.190$ mm
Pre-Test			
Post-Test			
Increase			

Ring Side Clearance*		A	B	C	D	Avg.	Min.	Specification
<b>Top</b>	Pre-Test							0.193+/-0.032 mm
	Post-Test							
	LSC							
<b>Int..</b>	Pre-Test							0.090+/-0.020 mm
	Post-Test							
	LSC							
<b>Oil</b>	Pre-Test							0.073+/-0.016 mm
	Post-Test							
	LSC							

**\*Notes:**

1. Write "Stuck" In Place Of Dimension When Applicable.
2. Write "<0.038 mm" For Clearance When Applicable.
3. Write ">" Before Calculated Decrease Or Average Decrease Values That Incorporate A "<0.038 mm" in Calculation.
- 4 LSC: Loss Of Side Clearance.
5. Min: Intermediate And Oil Ring Minimum Side Clearance Is Measured 360° Around Piston.

**1K/1N  
Form 9  
Liner Measurements**

Lab	EOT Date	EOT Time	Method
Stand	Run Number		
Formulation/Stand Code			
Oilcode			

<b>Liner Surface Finish (Micrometer)</b>			
Distance From Top	Transverse	Longitudinal	Average
130 mm			
50 mm			
25 mm			
			Total Average

<b>% Liner Bore Polish - Grid (Add T/AT Values From Grid)</b>	
Thrust	
Anti-Thrust	
Total	

<b>Liner Bore Measurement (mm)</b>				
<b>Before Test – Diameter (Dial Bore Gage)</b>				
Bore Height	Longitudinal	Transverse		
230 mm				
130 mm				
50 mm				
25 mm				
15 mm				
<b>After Test - (Surface Profile)</b>				
	Longitudinal		Transverse	
	Front	Rear	T	AT
Wear Step @ 15mm				

**1K/1N**  
**Form 10**  
**Characteristics Of The Data Acquisition System**

Lab	EOT Date	EOT Time	Method
Stand	Run Number		
Formulation/Stand Code			
Oilcode			

Parameter (1)	Sensing Device (2)	Calibration Frequency (3)	Record Device (4)	Observation Frequency (5)	Record Frequency (6)	Log Frequency (7)	System Response (8)
<b>Operation Conditions</b>							
Engine Speed (R\min)							
Engine Power (kW)							
Fuel Flow (g/min)							
Humidity (g/kg)							
Coolant Out							
Coolant In							
Oil To Bearing							
Oil Cooler In							
Inlet Air							
Exhaust							
Fuel							
<b>Pressures (kPa)</b>							
Oil To Bearing							
Oil To Jet							
Inlet Air							
Exhaust							
Fuel @ Filter HSG							
Crankcase VAC							
<b>Flows (L/min)</b>							
Blowby							
Coolant Flow							

**Legend:**


- (1) Operating Parameter
- (2) The Type Of Device Used To Measure Temperature, Pressure Or Flow
- (3) Frequency At Which The Measurement System Is Calibrated
- (4) The Type Of Device Where Data Is Recorded
  - LG - Hanglog Sheet
  - DL - Automatic Data Logger
  - C/M - Computer, Using Manual Data Entry
  - SC - Strip Chart Recorder
  - C/D - Computer, Using Direct I/O Entry

- (5) Data Area Observed But Only Recorded If Off Spec.
- (6) Data Are Recorded But Are Not Retained At EOT
- (7) Data Are Logged As Permanent Record, Note Specify If:
  - SS - Snapshot Taken At Specified Frequency
  - AG/X Average Of X Data Points At Specified Frequency
- (8) Time For The Output To Reach 63.2% Of Final Value For Step Change At Input

**1K/1N  
Form 11**

Lab	EOT Date	EOT Time	Method
Stand	Run Number		
Formulation/Stand Code			
Oilcode			

Inlet Air	130
C	127
	124
Oil to	110
Bearing	107
C	104
Coolant In	91
C	88
	85
Coolant Out	96
C	93
	90
Exhaust	580
C	550
	520
Fuel Rate	186
g/min	185
	184
Engine Speed	2110
r/min	2100
	2090
Power	57
kW	52
	47

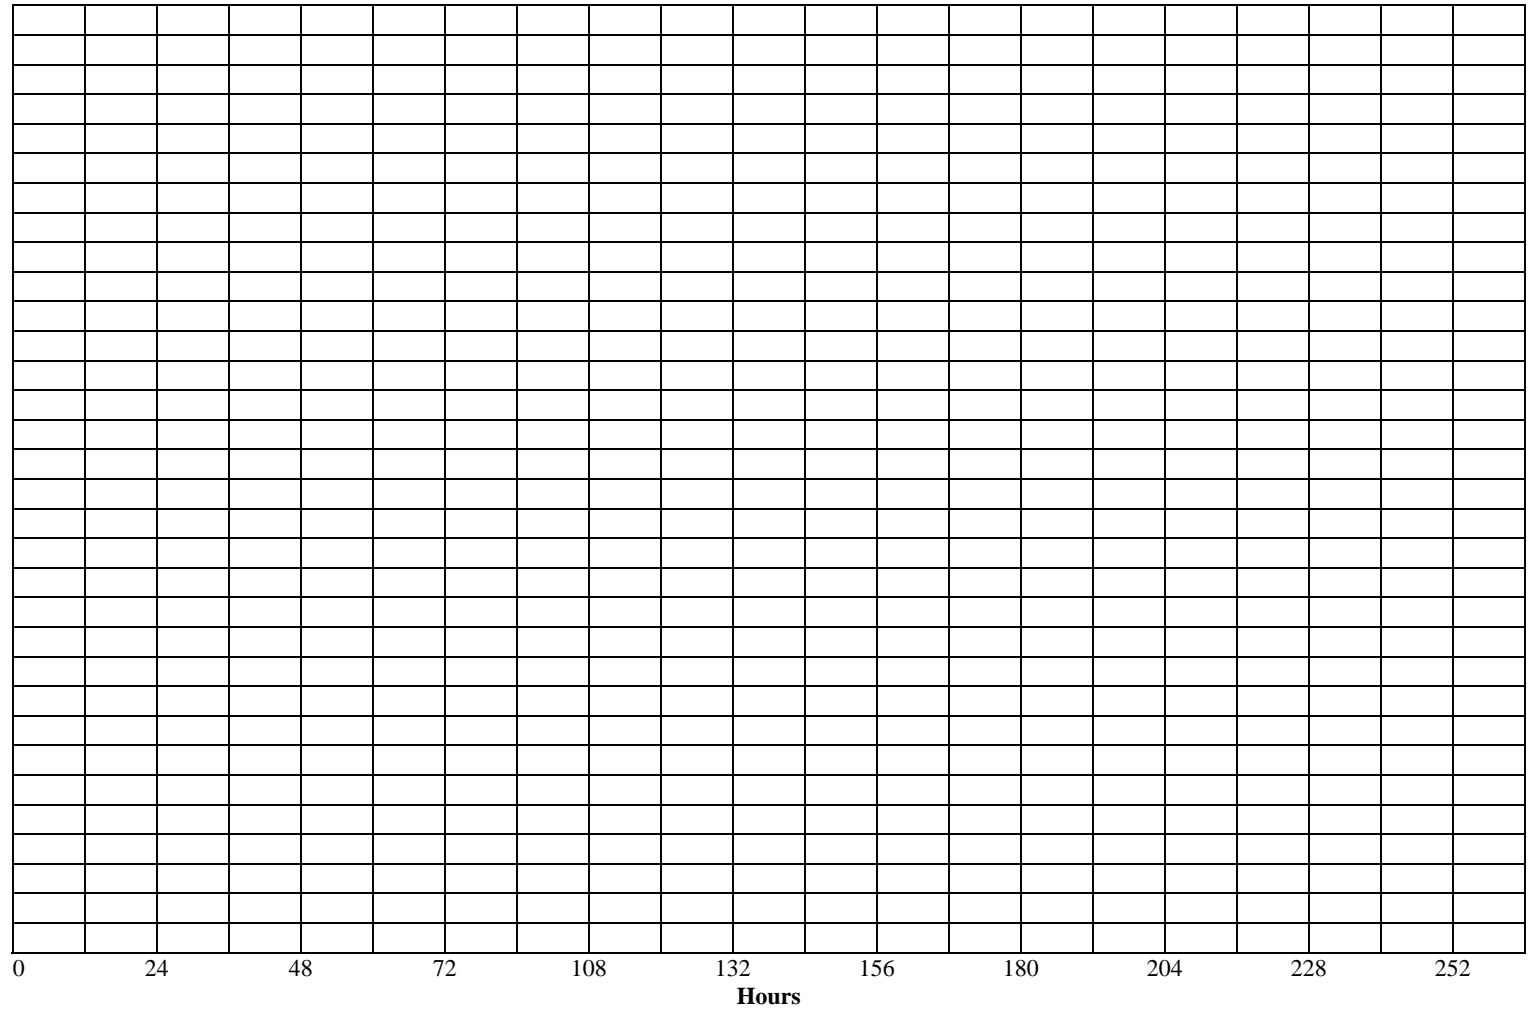






**1K/1N**  
**Form 13**  
**Oil Consumption Plot**

Lab	EOT Date	EOT Time	Method
Stand	Run Number		
Formulation/Stand Code			
Oilcode			

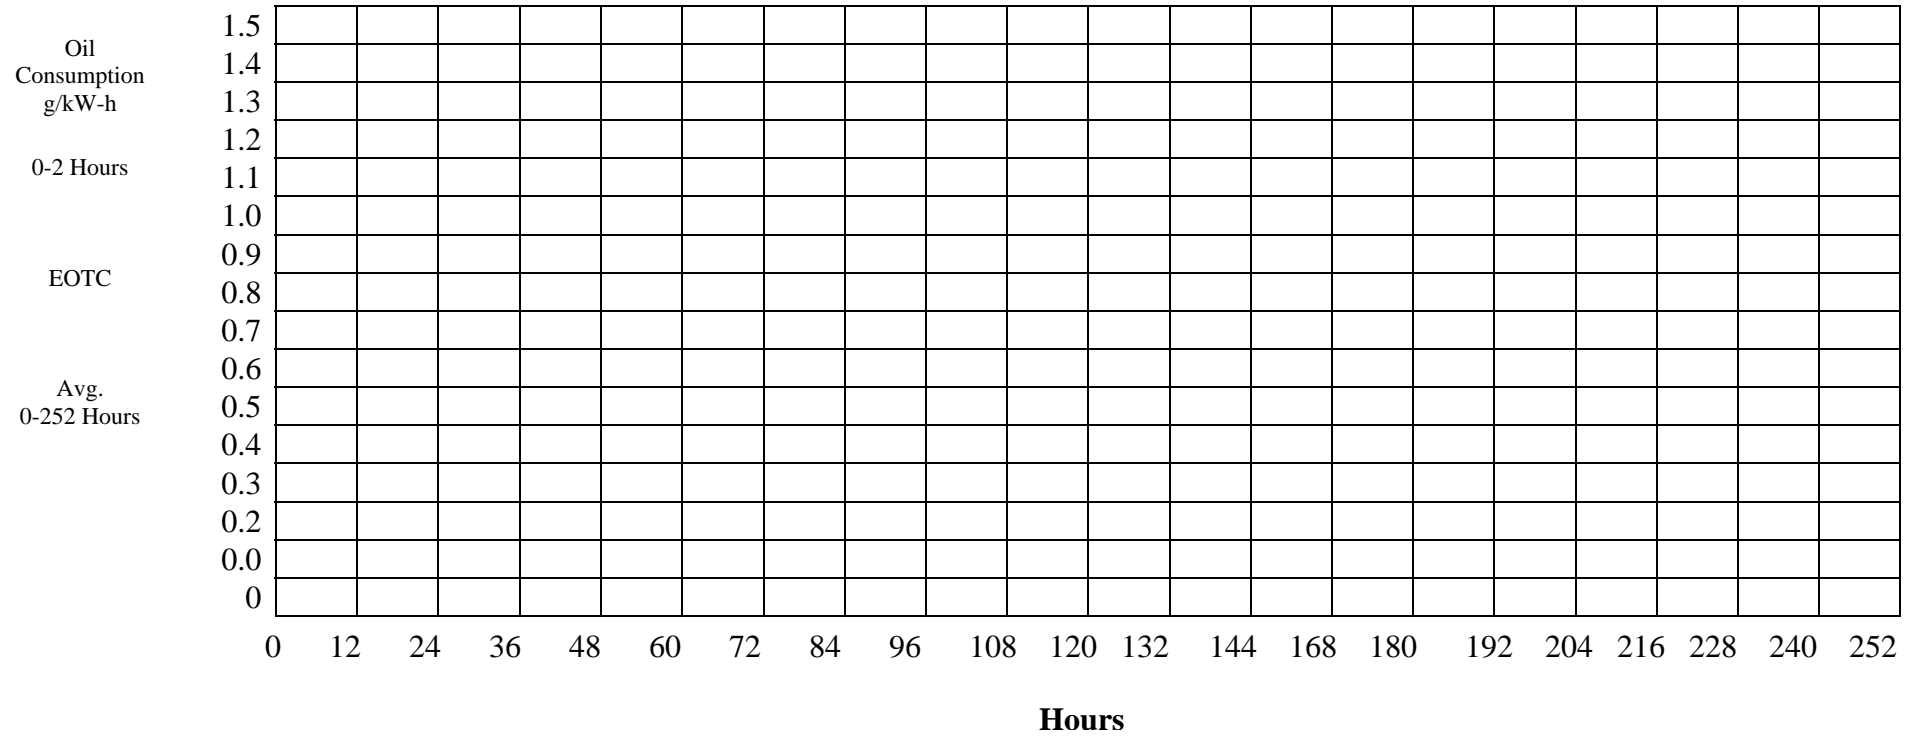

**1K/1N**  
**Form 14**  
**Piston, Ring And Liner Photographs**

Lab	EOT Date	EOT Time	Method
Stand	Run Number		
Formulation/Stand Code			
Oilcode			

Refer to Appendix C for example of Photo Layout.







**1K/1N**  
**Form 16**  
**TMC Control Chart Analysis**

Lab	EOT Date	EOT Time	Method
Stand	Run Number		
Formulation/Stand Code			
Oilcode			

Refer to Appendix C for example of Control Chart Analysis page.

**1K/1N**  
**Form 17**  
**Fuel Batch Analysis**

Lab	EOT Date	EOT Time	Method
Stand	Run Number		
Formulation/Stand Code			
Oilcode			

Refer to Appendix C for examples of appropriate Fuel Batch Analysis pages.



**1K/1N**  
**Form 18**  
**American Chemistry Council Code of Practice**  
**Test Laboratory Conformance Statement**

Test Laboratory				
Test Sponsor				
Formulation / Stand Code				
Test Number				
Start Date		Start Time		Time Zone

No. 1 All requirements of the ACC Code of Practice for which the test laboratory is responsible were met in the conduct of this test. Yes \_\_\_\_\_ No\_\_\_\_\_ \*

No. 2 The laboratory ran this test for the full duration following all procedural requirements; and all operational validity requirements of the latest version of the applicable test procedure (ASTM or other), including all updates issued by the organization responsible for the test, were met.  
 Yes \_\_\_\_\_ No\_\_\_\_\_ \*

If the response to this Declaration is “No”, does the test engineer consider the deviations from operational validity requirements that occurred to be beyond the control of the laboratory? Yes \_\_\_\_\_\* No\_\_\_\_\_

No 3. A deviation occurred for one of the test parameters identified by the organization responsible for the test as being a special case. Yes \_\_\_\_\_\* No\_\_\_\_\_ *(This currently applies only to specific deviations identified in the ASTM Information Letter System)*

	Operational review of this test indicates that the results should be included in the Multiple Test Acceptance Criteria calculations.
	*Operational review of this test indicates that the results should not be included in the Multiple Test Acceptance Criteria calculations.

Note: *Supporting comments are required for all responses identified with an asterisk.*

Comments

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Date

\_\_\_\_\_  
Typed Name

\_\_\_\_\_  
Title